

Fig.1 The PAC3 module.


APPLICATION

The relay module used to work with controllers as an executive element to activate peripheral equipment requiring greater power, through the analog output of the controller.

DESCRIPTION

The PAC3 and the PAC3T are three relay modules that converts the analog input signal (0 - 10V) from the controller to 8 discrete, voltageless output states. Relays have SPST-NO contacts. Built-in input voltage level detection circuit allows enforce logical signals without transition states (no short switching of contacts). An important parameter is **the input signal settling time**. Typically it is 400ms and can be adapted to the needs of the customer in the range of 20ms up to several minutes. Time should be chosen to be equal to or greater than the output signal settling time of the controller, which proofing the module for short-term interference.

The hysteresis circuit prevents contacts from "flickering" in switching points. The PAC3 has electromechanical relays with normally open contacts. The PAC3T has a MOSFET solid state relays. LED diodes indicate output states according to enclosed diagram.

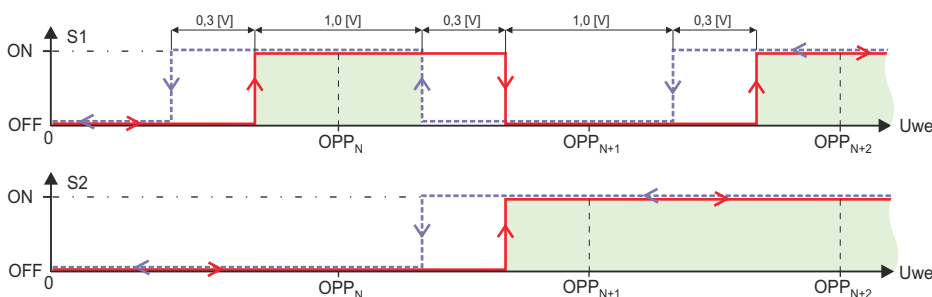

For $N = 1 \dots 8$ OPP - optimal switching point

■ - assured switching range

Fig.2 The principle of switching.

TABLE OF STATES

OPP [V]	S1	S2	S3
0	○	○	○
1,3	●	○	○
2,6	○	●	○
3,9	●	●	○
5,2	○	○	●
6,5	●	○	●
7,8	○	●	●
9,1	●	●	●

OPP - optimal switching point

○ - opened contacts

● - closed contacts

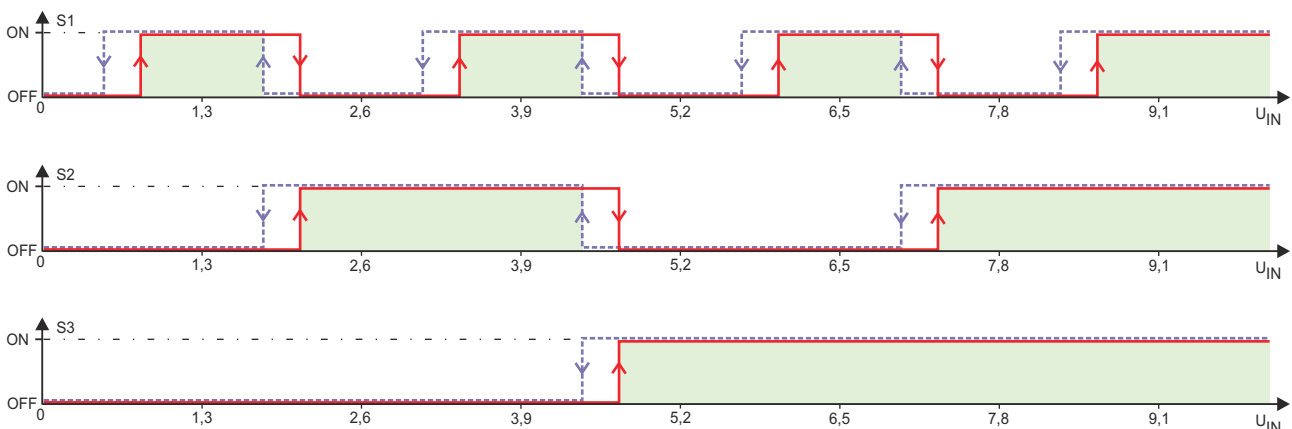


Fig.3 Switching diagram

PAC3, PAC3T

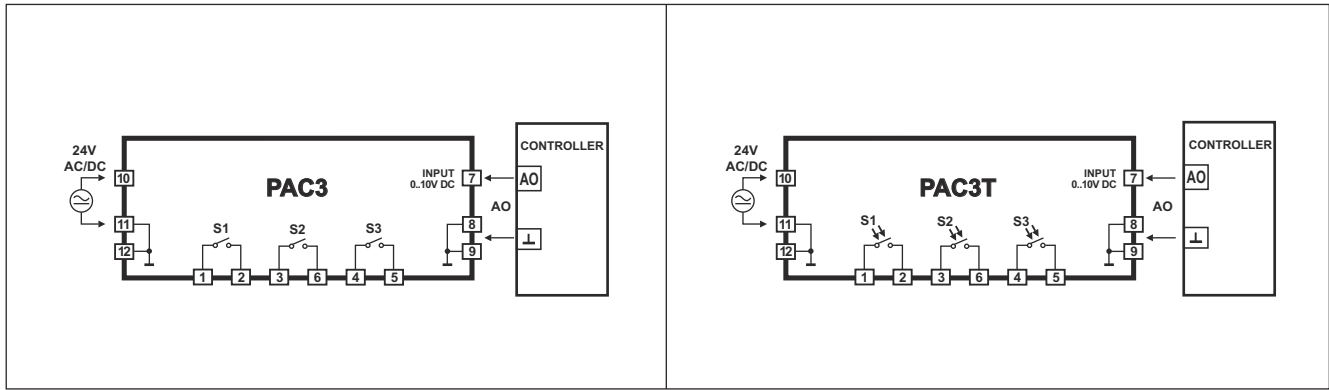


Fig.4 Connections of the PAC3 and the PAC3T.

TECHNICAL DATA

Module name	PAC3	PAC3T
Power supply	24 V AC/DC \pm 10%	
Max. current consumption	40 mA for 24 V AC / DC	26 mA for 24 V AC / DC
Input resistance	100k Ω	
Input voltage	0 - 10V	
Sensitivity	10mV	
Input signal settling time	400ms	
Hysteresis width	300mV	
Type of relay	Electromechanical	Solid state MOSFET
Contact switching capacity alternating current $\cos\varphi=1$ direct current	400V, 8A [2000VA] 32V, 8A	270V, 130mA 400V, 130mA
Contact resistance	100m Ω	30 Ω
Protection class of the case	IP-40	
Compliance with EU standards	2004/108/EC	
Ambient temperature range	-10...+55 $^{\circ}$ C	
Diameter of terminals	2,5 mm 2	
Protections	against reverse polarisation	
Mounting	DIN-35 rail	
Dimensions (L x W x H)	90mm x 17,5mm x 56mm	
Weight	100 g	90 g

November 2016